



# RGB PRO Line Flex Strip - black casing RGBW+BFS-24V-5M



In association with



**Length:** 1-, 5-meter, and custom reels

**Wire Color:** black

Output	
LED Type	SMD 5050
LED Channels	R-G-B-W
LED Count	70 per meter (3.3-FT)
LED-to-Chip Ratio	7-to-1 (10 IC's per meter)
Greyscale	16-bit, 65,536 dimming levels*
Control	
Individually Addressable	each set of 7 LED's
Control Systems	NDB+ (ArtNet, E1.31), WEC+, MeshTek BLE
Max Distance before Power Injection	10 meters (approx. 33-FT)
Electrical & Safety	
Input Voltage	24 VDC
Current	0.15 Amps / meter
Power	3.6 Watts / meter
Wire	20 AWG, 3C, UV protected
Inline power injection	via Minleon Power T+'s & RGB+4A-24V
Physical	
Width	1-inch
LED Pitch	1-inch
Housing	silicone over black pcb
Connector Type	LLT twist-lock
Lead/End Wire length	6" (standard)
Operating Temperature	Neg -20 to +50 Cel. / Neg -4 to +122 Far.

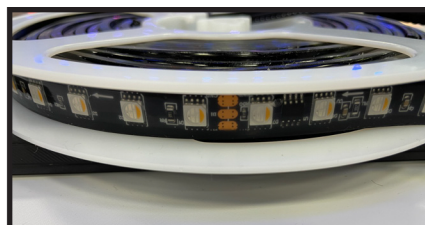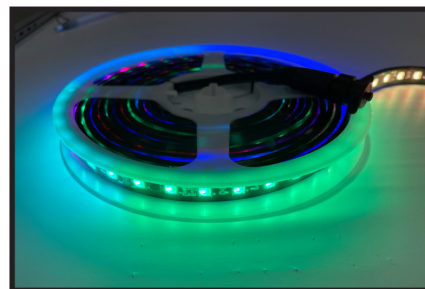

USA HQ  
Mechanicsburg, PA  
(717) 763-1055

[www.minleonusa.com](http://www.minleonusa.com)



Specifications as of July 2023 and are subject to change.

Powered by  
**MESHTEK**