



RGB PLUS Line Bullet Pixels RGB+BLP, RGBW+BLP

In association with




Pitch: 4-, 6-, 12-inch, custom

Bulb Count: 5-, 10-, 25-light, custom

Wire Color: black, green, white, clear

Ends: thru-connect, terminated

Output	
LED Type	DIP 5mm
LED Channels	R-G-B, or R-G-B-WW option
Greyscale	16-bit, 65,536 dimming levels*
LED Quantity	1
Viewing Angle	180-degrees
Control	
Individually Addressable	yes
Control Systems	NDB+ (ArtNet, E1.31), WEC+, MC+
Max Lights before power injection	approx. 125L
Max Distance before Power Injection	approx. 100-feet
Electrical & Safety	
Input Voltage	12 VDC
Current	0.028 Amps
Power	0.336 Watts
Wire	20 AWG, 3C, UV protected
Inline power injection	via Minleon Power T+'s & RGB-5A
Certifications	(c)UL listed, IP 65, CE
Physical	
Diameter	10mm
Size	1.5" long x 0.75" wide at base
Weight	approx. 5 oz. per bulb
Housing	polycarbonate
Mounting bracket	Riveted, to secure into panels or strips
Connector Type	LLT twist-lock
Operating Temperature	Neg -20 to +50 Cel. / Neg -4 to +122 Far.

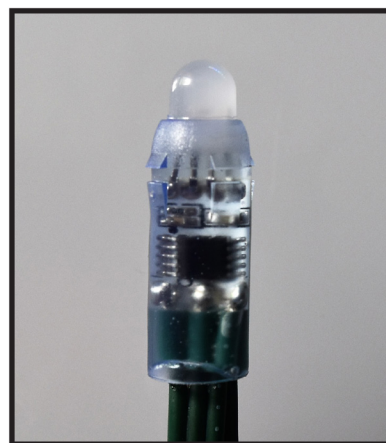

USA HQ
Mechanicsburg, PA
(717) 763-1055

www.minleonusa.com



* 8-bit via DDP.

Specifications as of May 2021 and are subject to change.

Powered by
MESHTEK