



RGB+PLUS Line Controllable Cubes RGB+Cube-4


In association with



Sizes: 4-inch

Wire Color: black, green, white

Output	
LED Type	SMD 5050
LED Channels	R-G-B
LED Count	8
Greyscale	16-bit, 65,536 dimming levels*
Viewing Angle	360-degrees
Control	
Individually Addressable	yes
Control Systems	NDB+ (ArtNet, E1.31), WEC+, MeshTek
Max Lamps before power injection	25
Max Distance before Power Injection	approx. 100-feet
Electrical & Safety	
Input Voltage	12 VDC
Current	0.112 Amps / lamp
Power	1.34 Watts / lamp
Wire	22 AWG for signal; 20 AWG for power; 3C, UV protected
Inline power injection	via Minleon Power T+'s & RGB+5A-12V
Certifications	IP 65
Physical	
Diameter (mm)	4-inches
Size	4 x 4 x 4"
Weight (kg)	approx. 0.8 lb. (w/ 3-FT lead and T-Way)
Housing	polycarbonate
Connector Type	LLT twist-lock, built in T-Way
Lead Wire length	3-feet (standard)
Operating Temperature	Neg -20 to +50 Cel. / Neg -4 to +122 Far.

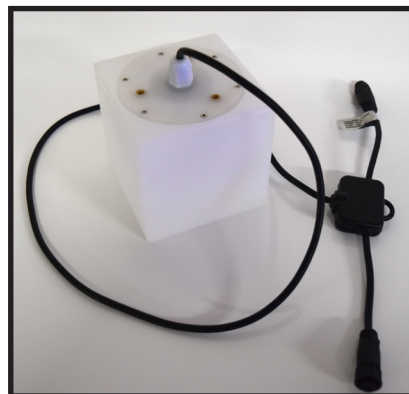

USA HQ
Mechanicsburg, PA
(717) 763-1055

www.minleonusa.com



* 8-bit via DDP.

Specifications as of July 2022 and are subject to change.

Powered by
MESHTEK