



RGB+PLUS Line T5 Light Tubes - 24V RGB+T5-24V

In association with



Length: 1, 2, 3, 4, 5 & 6-foot

Style: fluted, frosted


Wire Color: black, white, green

Pitch: 4-, 6-, custom

Bulb Count: variable, custom

Ends: thru-connect, terminated

Output	
LED Type	SMD 5050
LED Channels	R-G-B
LED Count	2 / pixel
Greyscale	16-bit, 65,536 dimming levels*
Viewing Angle	360-degrees
Control	
Individually Addressable	yes
Control Systems	NDB+ (ArtNet, E1.31), WEC+, MC+
Max Lights before power injection	approx. 125L
Max Distance before Power Injection	approx. 100-feet
Electrical & Safety	
Input Voltage	24 VDC
Current	0.015 Amps / pixel
Power	0.36 Watts / pixel
Wire	20 AWG, 3C, UV protected
Inline power injection	via Minleon Power T+'s & RGB+3A-24V
Certifications	(c)UL listed, IP 65, CE
Physical	
Diameter	20 mm (at end cap)
Size	variable, see options, top of page
Weight	approx. 1.6 oz. per foot
Housing	polycarbonate
Connector Type	LLT twist-lock
Lead/End Wire length	6" (standard)
Operating Temperature	Neg -20 to +50 Cel. / Neg -4 to +122 Far.

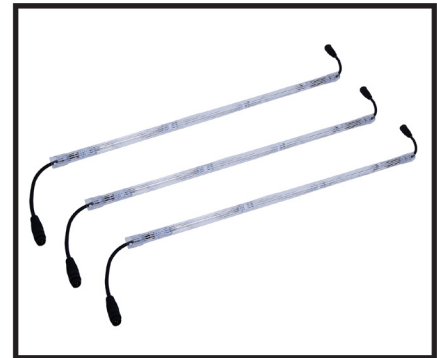

USA HQ
Mechanicsburg, PA
(717) 763-1055

www.minleonusa.com



* 8-bit via DDP.

Specifications as of May 2021 and are subject to change.

Powered by
MESHTEK