




APEX

POWERED BY HYPERLUX®

The Apex is premium architectural accent lighting — **up to 800 lumens** of HyperLux®-powered RGBW that unifies with the Ridge and Spectra on the same controller line. Delivering the sleek under-soffit accent look of traditional can lights, with the full color palette of a modern digital lighting system — season after season, year round.

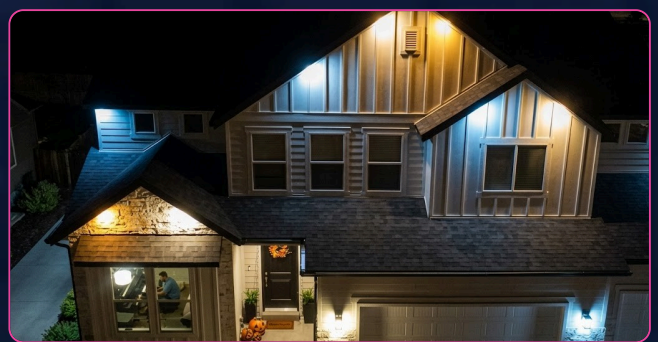

Features and Advantages:



Plug 'n' Play Solution
No Splicing
Snap-Fit Connectors



IP65 Waterproof
Lighting



Highest Lumens Output
per Channel with
HyperLux Technology




Unified Line
Daisy-chainable with
Ridge & Spectra



One Controller
drives up to 20 Apex
on one line at 24V DC



Architectural Accent
The sleek can-light look,
powered by HyperLux®



Works with MeshTek's
Advanced Bluetooth Mesh
Controller and Apps



Surface Mount
Under Soffit Installation

General Specifications:

Application	Under-soffit accent lighting
Standard Supply Voltage	24V DC (using MeshTek-provided 24V DC MeanWell Power Supply)
Operating Temperature	-10°C to +50°C
LED Configuration	Digitally Addressable RGBW High-Power LEDs
Power Consumption	8W per fixture
Lumens Output	Up to 800 lumens
Night Sky Compliance	Complies with Night Sky Compliance
Finish Options	Available in Black and White
Mounting	Surface mount, under soffit
IP Rating	IP65
Light Output	16 million colors and dimmable
Whites Color Temperature Range	2000K to 7500K (via RGBW mixing)
Data Line	4-wire with data redundancy
Fixtures per Controller Line	Up to 20 Apex at 24V DC

Figures are based on light testing and product datasheets, shown per channel. © BlueHopper Solutions LLC, a MeshTek company.