



RGB+PLUS Line T8 Light Tubes RGB+T8

In association with




Length: 1, 2, 3, 4, 5 & 6-foot, custom

Style: clear, frosted

Ends: thru-connect or terminated

Wire Color: black, white, green

Output	
LED Type	SMD 5050
LED Channels	R-G-B
LED Count	12 per foot
Greyscale	16-bit, 65,536 dimming levels*
Viewing Angle	360-degrees
Control	
Individually Addressable	yes
Control Systems	NDB+ (ArtNet, E1.31), WEC+, MC+
Max Lights before power injection	approx. 125L
Max Distance before Power Injection	approx. 100-feet
Electrical & Safety	
Input Voltage	12 VDC
Current	0.336 Amps / foot
Power	4.032 Watts / foot
Wire	20 AWG, 3C, UV protected
Inline power injection	via Minleon Power T+'s & RGB+5A-12V
Physical	
Diameter	~30 mm (at end cap)
Pitch	1-inch
Weight	approx. 2. oz. per foot
Housing	polycarbonate
Connector Type	LLT twist-lock
Lead/End Wire length	6" (standard)
Operating Temperature	Neg -20 to +50 Cel. / Neg -4 to +122 Far.

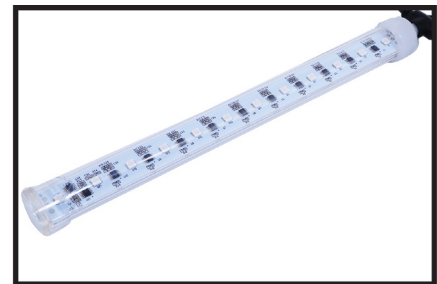

USA HQ
Mechanicsburg, PA
(717) 763-1055

www.minleonusa.com



* 8-bit via DDP.

Specifications as of May 2021 and are subject to change.

Powered by
MESHTEK